

Weight Indicators

Intuition 20i and 22i



Versatile Stainless Steel Indicators for Commercial and Industrial Applications

- Configurable with either LCD or LED display
- Rechargeable battery with smart energy management
- Selectable standard digital I/O with four dry-relay outputs/two opto-isolated inputs
- Standard RS 485, full duplex Interface
- Compatible with digital load cell interface
- Alibi memory with up to 100k transactions
- Auto-switching, AC power supply 115 VAC to 230 VAC, 50-60 Hz
- OIML and CE certificated
- Plug and play ready for option card interchange
- Configurable conversion speed, up to 40 samples per second
- Standard keypad: 12 numeric keys + 7 functional keys
- Up to two serial communication ports possible
- Eight-step batching software enables greater flexibility
- Modular design for interchangeability
- Configuration as a local or remote unit
- Totalizing features with reporting function
- Customizable of ticket formatting
- Available options include: analog output, digital I/O, Ethernet TCP/IP and USB 2.0 board

Weight Indicators

Intuition 20i and 22i

FEATURES

- Large six-digit display (0.8 in, 20 mm): LCD (22i); LED (20i)
- Built-in weighing and counting modes
- Alibi memory retains last 100k transactions
- Drives up to 10 x 350 Ω load cells (4/6 wires), or up to 20 units of 700 Ω
- Two serial ports for printing and networking, including various serial stream formats
- 20 mA serial port for a remote display
- Stainless steel enclosure (IP67)
- Custom ticket printing—gross, net and setpoint format can be customized up to 300 characters and print time and date, unit ID, and consecutive ticket number
- Accumulation—weights are totaled, with armed print function
- Batching—up to eight batch steps with latched or continuous outputs for gross, net and delay setpoint. Actions include trip high or low, wait for standstill, print, accumulate and tare
- Keyed tare—preset tare value can be entered when the gross weight is at zero
- Local/remote—remote unit displays weight and transmits key press commands to the local unit
- User and operator password protection
- Audit trail tracking
- Time and date

OPTIONS


- Rechargeable battery 3.7 V, 5.3 A/h: 42 h operation (22i); 18 h operation (20i)
- Analog output 0/2–10 VDC or 0/4–20 mA Digital I/O card, four dry-relay outputs/two opto-isolated inputs for setpoints and batching
- Ethernet TCP/IP and USB 2.0 board

APPLICATIONS

- Bench and floor scales
- Counting scales
- Inventory control
- Process weighing
- Truck scales
- Various industrial systems

Note: For countries within North, Central or South America region, please contact vpgt.usa@vpgsensors.com.

CONFIGURATION

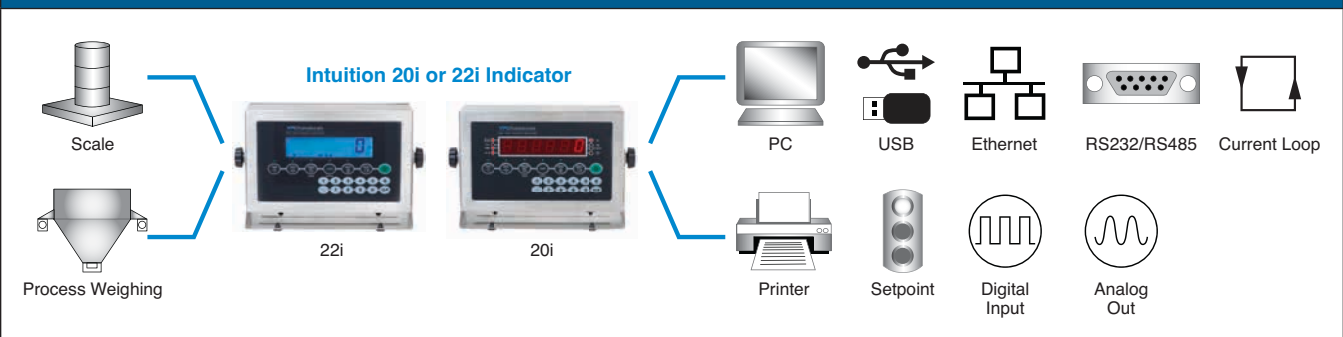

DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.