



FH

High Precision Weighing Balance




FH High Precision Weighing Balance

Features:

- 1/30,000 and 1/60,000 display resolution available
- Digital calibration
- LCD display with LED backlight
- Auto zero tracking, double overload protection
- Weighing, counting and percentage modes
- Selectable weighing units, up to 13 weighing units available
- More durable, more energy saving
- Auto temperature and linearity compensation
- A/D sampling speed setting
- Adjustable gravity value
- Selectable default weighing units
- Low power indication and auto power off
- Ni-MH rechargeable battery or dry battery(not included) with adaptor power supply
- Excellent protection for transportation
- Build-in bi-directional RS232 interface

Option:

- RTC card

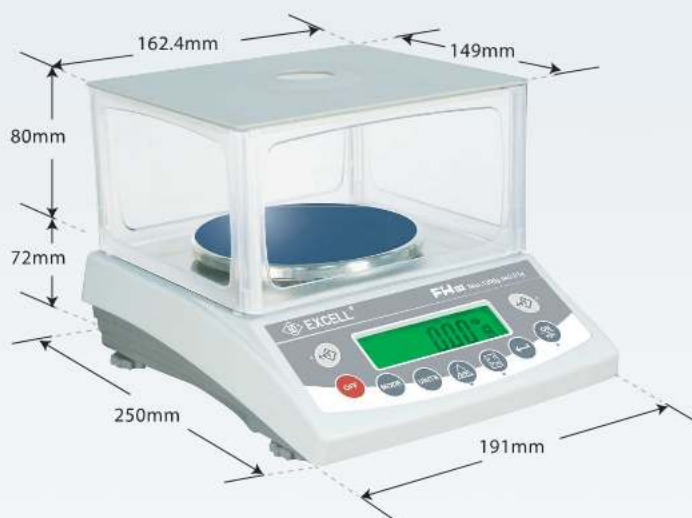

Specifications:

1/60,000 display resolution (1/30,000 display resolution available)

MODEL	CAPACITY	DIVISION
FH-300	300 g	0.005 g / 0.01 g
FH-600	600 g	0.01 g / 0.02 g
FH-1200	1200 g	0.02 g
FH-1500	1500 g	0.05 g
FH-3000	3000 g	0.05 g / 0.1 g

Operating Temperature: 5°C ~ 35°C (41°F ~ 95°F)

Power Source: Adaptor DC 9V + Ni-MH rechargeable battery (DC 6V/1.8Ah)
or 5 x UM-7 dry battery (DC 6V/1.8Ah) (not included)

Dimensions: 191 x 72 x 250 mm (W x H x D)

Platter Size: Square: 151 x 126 x 6.5 mm Round: \varnothing 120 mm

Display: LCD, 6 1/2 Digits, 16mm (Height), LED backlight



CE



EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Pao-Chiao Rd., Hsin-Tien, New Taipei City, 231, Taiwan

Tel:886-2-89191000

Fax:886-2-89191177

Website:www.excell-scale.com

E-mail:sales@excell-scale.com

FH High Precision Weighing Balance