

**Eoslift**

Hand Pallet Truck

# M25/30




## General Information

Model		M25	M30
Rated capacity	kg		2500/3000
Load center	mm		600
Service weight	kg		72-79

## size

Wheel			PU/NYLON
Max. lift height	$\boxed{H}$ mm	200	190
Min. fork height	$\boxed{H1}$ mm	85	75
Steer wheel	mm	$\Phi 200 \times 50 / \Phi 180 \times 50$	$\Phi 180 \times 50$
Load wheel	mm	$\Phi 80 \times 70$	$\Phi 74 \times 70$
Single Load wheel	mm		$\Phi 74 \times 93$
Fork width	$\boxed{B}$ mm		540/685
Fork length	$\boxed{L}$ mm		1150/1220
Overall length	$\boxed{L1}$ mm		1580/1650
Turning radius	$\boxed{R}$ mm		1325/1395

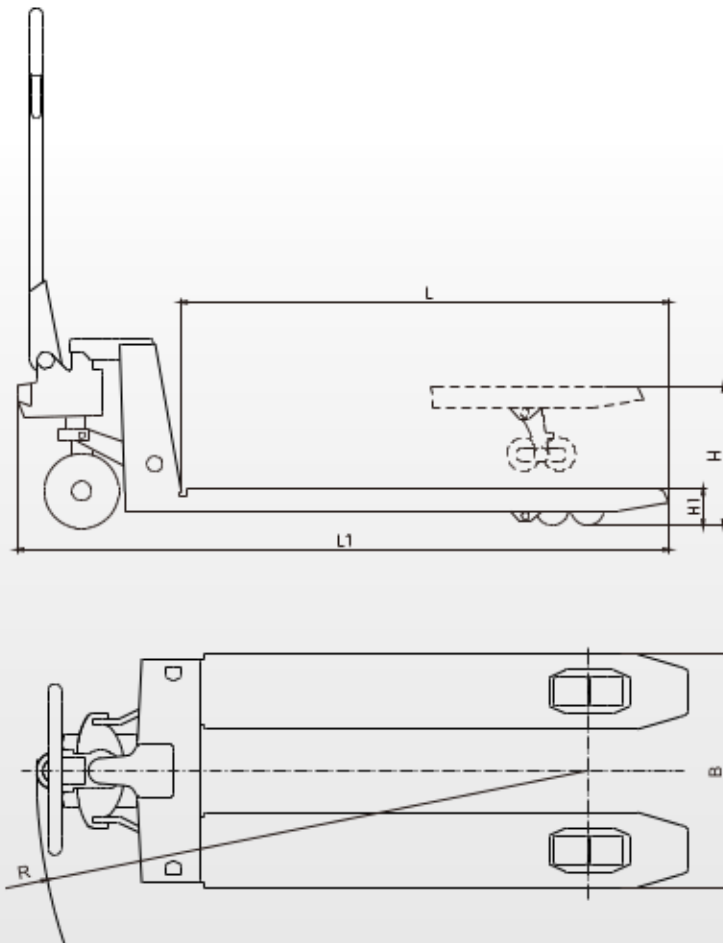

## Product features



### Stable and Reliable

- The reinforcements on the backs of all forks ensure their reliability
- Robotic welding technology provides smoother finish and higher strength of truck body
- Solid forks through integral stamping
- Chrome plated piston rod to ensure quiet and smooth lifting and long service life

### Comfort

- Standard EOSLIFT handle with ergonomic loop design reduces operator's fatigue
- Pallet entry and exit rollers offers easier entry and exit of pallet

### High Performance

- The hydraulic handle offers three control positions: lift, lower and neutral
- Seal rings conforming to German standards ensure excellent performance

### Easy Maintenance

- Galvanization of oil pump to avoid rust and extend its service life
- Overload protection prevents the truck from application under overloaded condition, reducing its maintenance cost
- Fully enclosed pump avoids contamination and oil leaking
- Convenient access to lubrication points for easy maintenance



---

**Eoslift Automation Technology Corp.**

No.99, Yanjia Road, Yuantong Town, Haiyan, Zhejiang Province, China 314317

Tel: +86 573 8622 9999

Fax: +86 573 8622 2900

[info@eoslift.com](mailto:info@eoslift.com)

[www.eoslift.com](http://www.eoslift.com)

**Hotline: 400-626-9090**

---

**Eoslift USA Corporation**

1590 S. Milliken Avenue, Unit H, Ontario, CA 91761, USA

Tel: +1-888-264-5008

Fax: +1-781-780-5915

[sales@eoslift.us](mailto:sales@eoslift.us)

[www.eoslift.us](http://www.eoslift.us)